

850nm 2.5Gb/s Multimode VCSEL LC TOSA (Preliminary)

Bookham's high speed multimode LC connectorized VCSEL TOSA is designed to meet stringent specifications for high speed data communications up to a data rate of 2.5 Gb/s. The high performance, high reliability multimode 850nm VCSEL of the TOSA is assembled in a hermetic tilted window TO46 package with integrated monitor photodiode and is aligned to a precision LC plastic barrel. The optical assembly can be used with 50/125 μm and 62.5/125 μm multimode fibers.


Features

- 850nm multimode emission
- Data rates up to 2.5 Gb/s
- Extended temperature range operation (-40°C to +85°C)
- Bias currents between 4 and 7 mA
- Excellent reliability
- Hermetic TO46 package
- Integrated monitor photodiode (MPD)
- LC plastic connector sleeve
- Compatible with 50/125 μm and 62.5/125 μm MM fibers
- Common cathode configuration (other configurations available on request)

Applications

- Datacom applications up to 2.5 Gb/s

Product Code	Data Rate	Package	Configuration	MPD	Connector
APA7201012101	2.5Gb/s	TO46	Common cathode	Yes	LC plastic connector sleeve

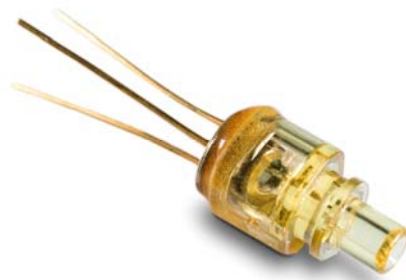

Electro – Optical Characteristics*

Parameter	Symbol	Conditions	Ratings			Unit
			Min	Typ	Max	
VCSEL						
Threshold current	I_{th}	25°C 85°C		2.0	2.5 4.0	mA mA
Fiber coupled optical power	P_{oc}	$I_{op} = 6mA$		0.5		mW
Slope efficiency	η	$I_{op} = 6mA$	0.07	0.125	0.2	mW/mA
Coupling efficiency	η_{oc}	$I_{op} = 6mA$		75		%
Operating voltage	U_{op}	$I_{op} = 6mA$	1.4	1.9	2.10	V
Emission wavelength	λ	$I_{op} = 6mA$	840	850	860	nm
Spectral bandwidth, RMS	$\Delta\lambda$	$I_{op} = 6mA$			0.85	nm
Differential resistance	R_d	$I_{op} = 6mA$	25	45	60	Ω
Bandwidth	f_{3dB}	$I_{op} = 6mA$	3.5	5		GHz
Rise time	t_r	$I_{op} = 6mA, 20\% - 80\%,$ ER = 10dB			130	ps
Fall time	t_f				150	ps
Relative intensity noise	$RIN_{12(OMA)}$	$I_{op} = 6mA, 1.87GHz BW$			-122	dB/Hz
Monitor Photo Diode (MPD)						
Monitor current	I_{pd}	$P_{oc} = 0.5 mW$	100	250	600	μA
Dark current	$I_{d_{pd}}$	Bias = 3V		1	30	nA
Capacitance	C_{pd}	Bias = 3V			100	pF

Thermal Characteristics


Parameter	Symbol	Ratings			Unit
		Min	Typ	Max	
Wavelength tuning co-efficient	$\delta\lambda/\delta T$		0.06		nm/K
Threshold current variation -40°C - 85°C	ΔI_{th}		1.2	2.0	mA

* T=25°C unless otherwise noted

Absolute Maximum Ratings

Parameter	Rating	Unit
Optical output power	3.5	mW
Peak forward current	15	mA
VCSEL reverse voltage	5	V
MPD reverse voltage	10	V
MPD forward current	10	mA
Operating temperature	-40 to +85	°C
Storage temperature	-40 to +100	°C
Lead solder temperature (for 10 sec)	260	°C

Package Outline and Electrical Connections

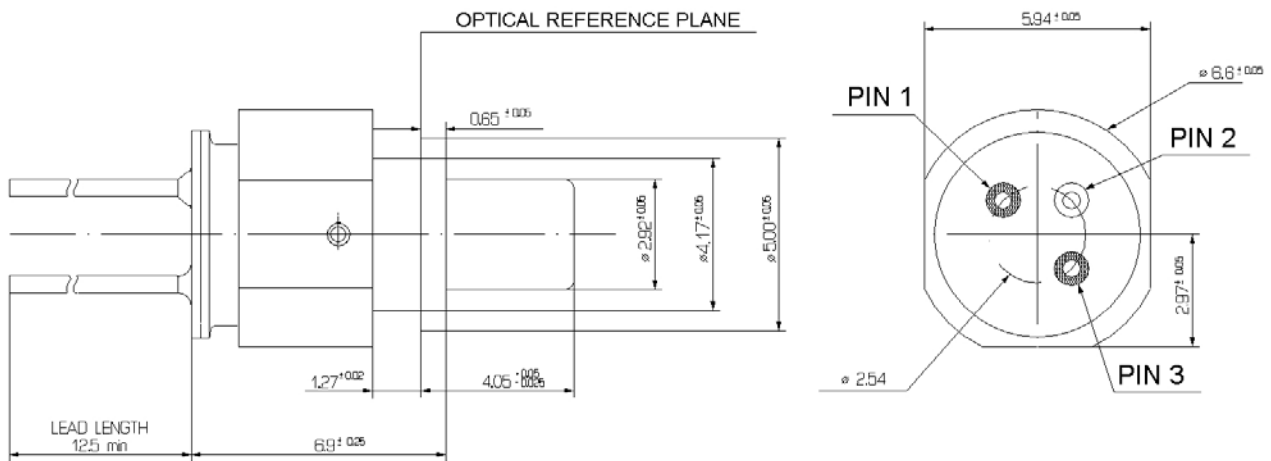

Pinout

Pin	Function
1	VCSEL anode
2	VCSEL cathode, MPD anode
3	MPD cathode

RoHS Compliance



Bookham is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

Ordering Information

Product Code	Data Rate	Package
APA7201012101	2.5Gb/s	TO46

Contact Information

Bookham (Switzerland) AG

Binzstrasse 17
8045 Zurich
Switzerland

- Tel: +41 44 455 8787
- Fax: +41 44 455 8586

www.bookham.com
highpower@bookham.com

EMEA Sales Contact

Gunnar Stolze

- Tel: +41 79 635 3777

North America East Coast Sales Contact

Michael Cutler

- Tel: +1 678 763 0777

Asia Sales Contact

Denis Lu

- Tel: +86 135 1066 0826

North America West Coast Sales Contact

Deepika Ranaweera

- Tel: +1 678 763 0777

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Bookham before they become applicable to any particular order or contract. In accordance with the Bookham policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of Bookham or others. Further details are available from any Bookham sales representative.

Safety Labels

